




CLEANROOM MANAGEMENT INTERNATIONAL

We care for your compliance

UPLOAD DATA IN REAL TIME VIA WIFI WITHOUT A COMPUTER

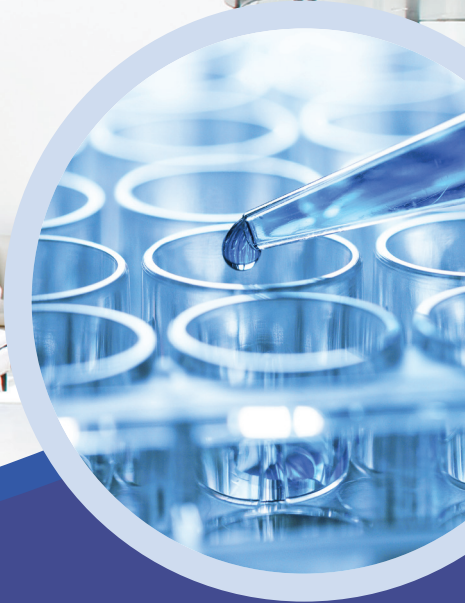

LTI-WM-WiFi

LogTag WiFi Interface Cradle

The new LogTag Wall Mounted Wireless Interface Cradle is a high-speed interface device that connects TREX/TREL/TRED data loggers to your WiFi network for real-time data download to a cloud platform.

- Use LTI-WM-WiFi to upload data in real time without access to a computer and installed software.
- Accepts TREX/TREL/TRED data loggers.
- Easily set up to work with your WiFi network.
- Downloaded data is fully encrypted and automatically uploaded to a secure server.
- Uploaded data is immediately available to authorized stakeholders.
- If the WiFi network is temporarily unavailable, downloaded data is stored in the LTI-WM- WiFi's buffer memory.
- Robust and reliable contacts are good for thousands of insertions.
- Inbuilt indicators show data download and network access status.

View more information about the LTI-WM-WiFi at: www.logtagrecorders.com

LogTag Recorders

The screenshot shows the LogTag Online web interface. At the top, there's a navigation bar with the LogTag Online logo and a user greeting 'Hello, Ben'. The main content area is titled 'Dashboard' and includes a section for 'Locations for: Ben'. A prominent card displays 'Ward A Vaccine Refrigerator' with a temperature of 7°C and a 'High Alarm Triggered!' warning. To the right, there are two tables: 'Recently Uploaded Files' and 'Recently Registered Devices'. The bottom of the dashboard features a navigation menu with icons for Dashboard, Locations, Devices, and LogTag Drive.

Receive real-time notifications with LogTag Online

LogTag Online is a secure, cloud-based application for managing & sharing your temperature data via a role-based permission system. A wide range of features include: real-time alarm notifications, location monitoring, temperature logs and troubleshooting records. No installed software is required and LogTag Online is accessible via any Internet-enabled device.

Specifications

Product Model	LTI-WM-WiFi
Operating Temperature Range	-25°C to +40°C
Storage Temperature Range	-40°C to +70°C
USB Standard	2.0
Logger buffer	Up to 45 logger downloads can be buffered
WiFi	2.4GHz 802.11 b/g/n High sensitivity internal antenna
Network Security	WPA/WPA2-PSK
Environmental	IP50 (Rated for inside use only)
Power Source	5V (Computer or USB wall charger)
Size	(W)70mm (H)114mm (D)38mm
Weight	100g
Case Material	ABS
Connectors	USB Micro
Certifications	FCC, CE & RoHS Compliant
Range (Clear Line of Sight)	40m
Accessories	2.0m USB cable

CMI BELGIUM
Avenue de Ramelot 3
B - 1480 Saintes (Sint Renelde)
Tel : +32 (0)2 531 11 21
info@cmitest.com

CMI NETHERLAND
Luchthavenweg 81
NL – 5657 EA Eindhoven
Tel : +31 (0)402 88 87 57
infnl@cmitest.com

CMI FRANCE
Ecoparc d’Affaires
F- 41210 Neung-sur-Beuvron
Tel : +33 (0)2 54 95 70 95
infofr@cmitest.com

Agence Rhône Alpes :
F- 26160 La Bégude de Mazenc
Tel: +33 (0)4 75 54 57 26



www.cmitest.com