

LEARN MORE ABOUT + OUR PRODUCTS



AVAILABLE IN 18 LANGUAGES!



Cleanroom Management International

We care for your compliance

CMI BELGIUM

Avenue de Ramelot 3
B - 1480 Saintes (Sint Renelde)
Tel : +32 (0)2 531 11 21
info@cmitest.com

CMI THE NETHERLANDS

Luchthavenweg 81
NL - 5657 EA Eindhoven
Tel : +31 (0)402 88 87 57
info@cmitest.com

CMI FRANCE

Ecoparc d'Affaires
F- 41210 Neung-sur-Beuvron
Tel : +33 (0)2 54 95 70 95
info@cmitest.com

Agence Rhône Alpes :
F- 26160 La Bégude-de-Mazenc
Tel : +33 (0)4 75 54 57 26



www.cmitest.com

PELI LIMITED LIFETIME* WARRANTY

Peli Products, S.L.U. ("Peli") guarantees its lights and headlamps for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see www.peli.com/WARRANTY

* Lifetime guarantee not applicable where prohibited by law.



Follow us on: PELInsights subscribe now!

©2020 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com. Part No. 0030-000-501E DEC 20


PELI™ FLASHLIGHTS

CATALOGUE

JANUARY 2021



SINCE 1976

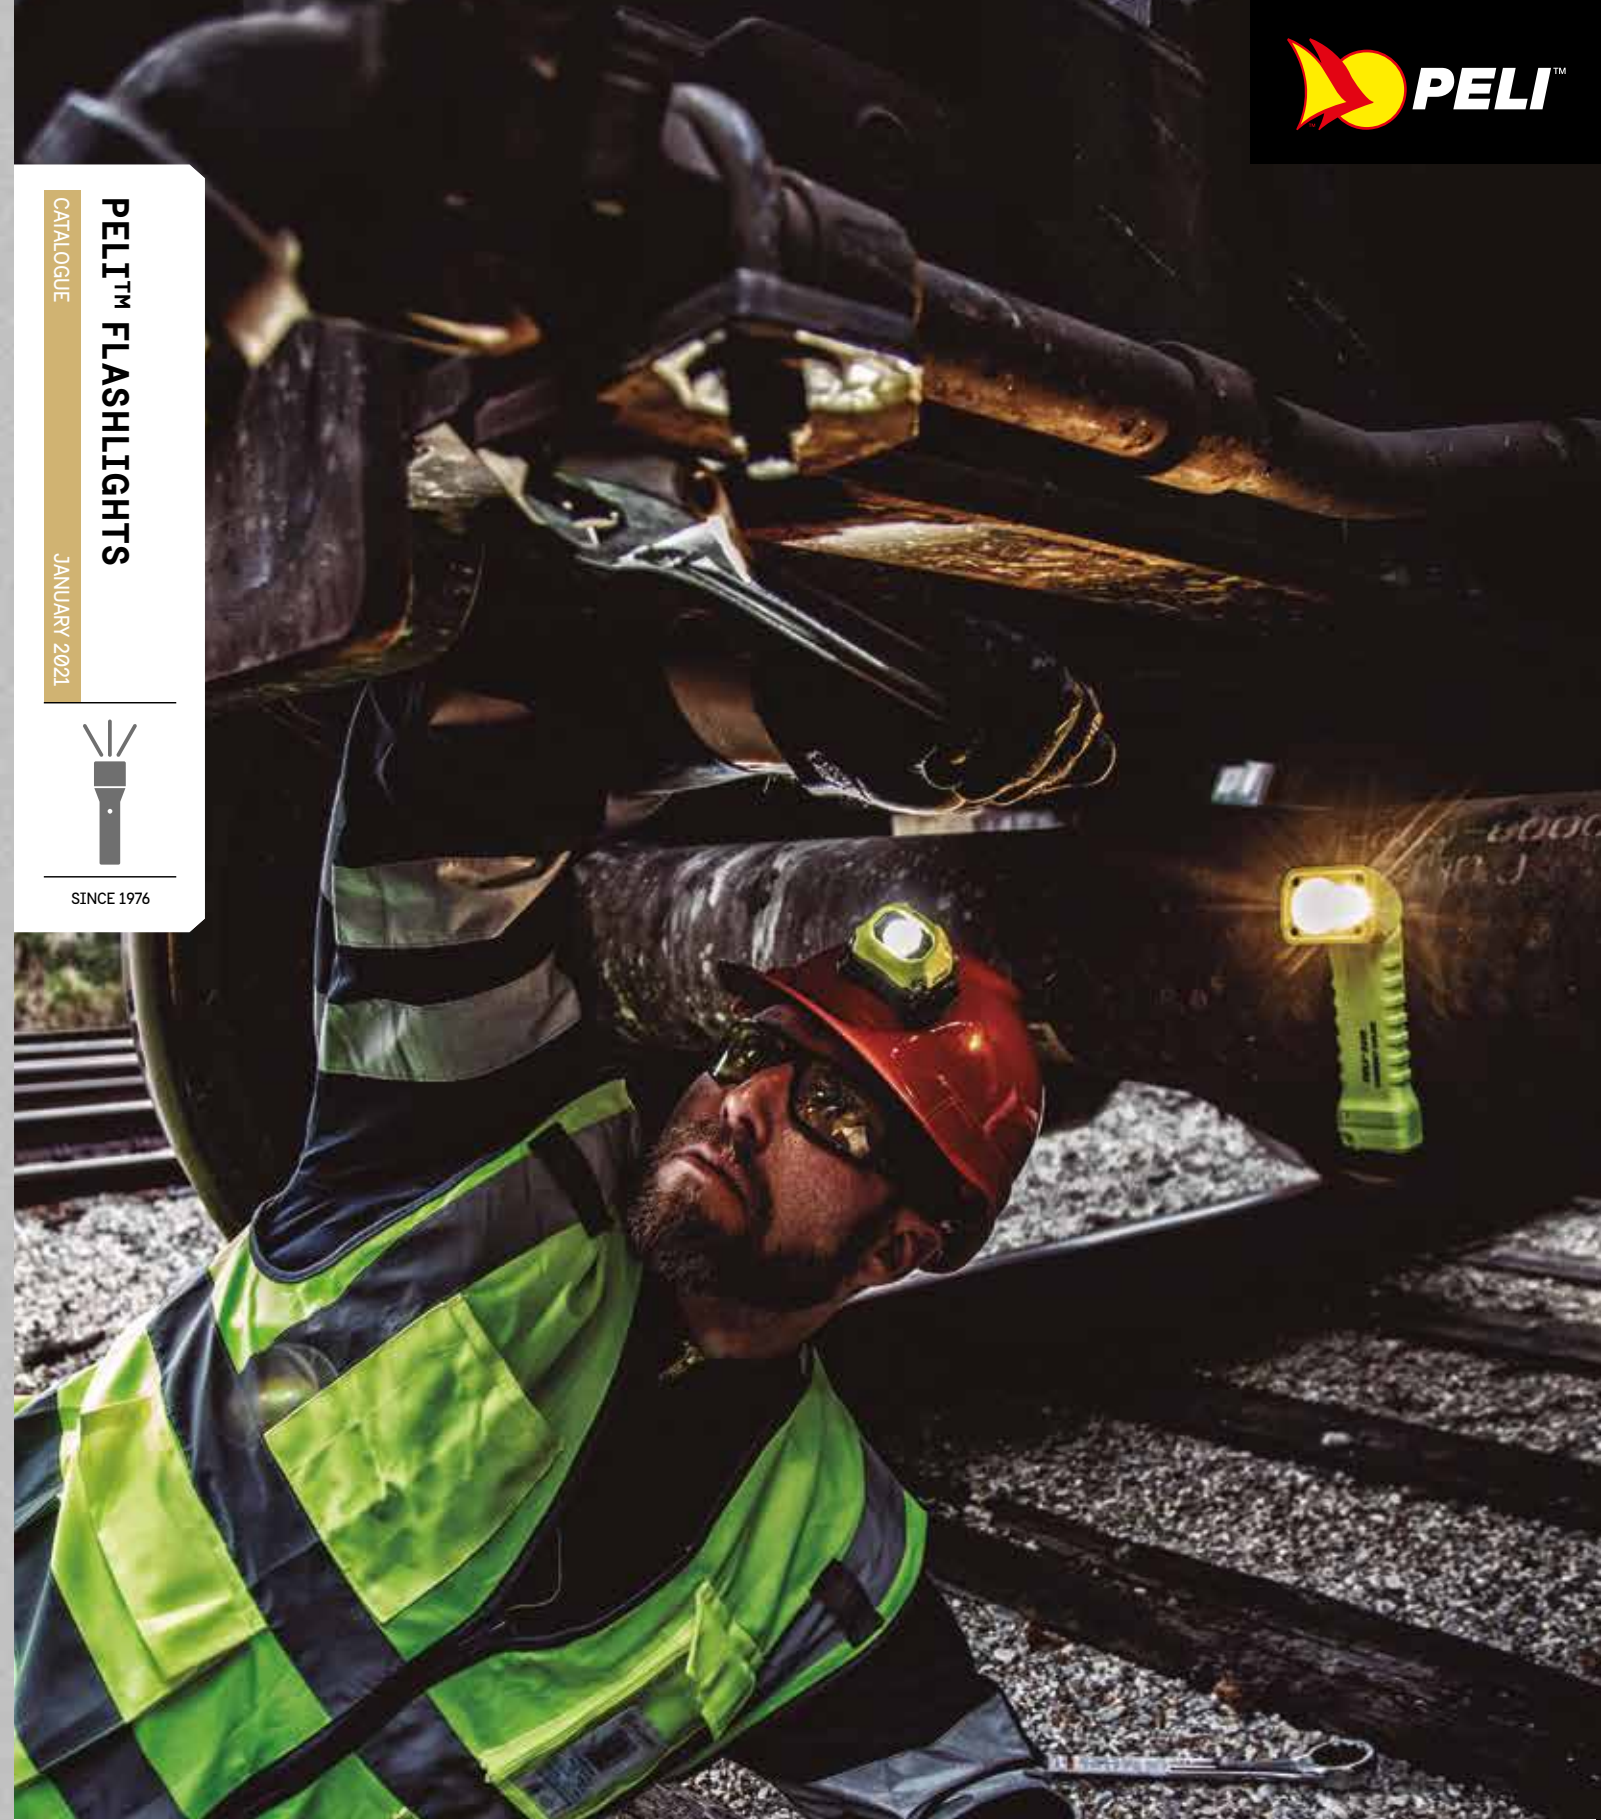

Cleanroom Management International

We care for your compliance



LIFETIME GUARANTEE*

+ TABLE OF CONTENTS

PERFORMANCE PELI FLASHLIGHTS	3
SAFETY	4-5
PELI FLASHLIGHTS	
Small Lights	6
Medium Torches	7-8
Large Lights	9
Atex Torches	10-13
Tactical Lights	14-15
Headlamps	16-17
PELI LIGHT MOUNTING & HOLSTER	18
LIGHTING FEATURES	18
SPECIFICATIONS	19-21
FULL LINE OVERVIEW	22-23

PELI™ FLASHLIGHTS

When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner.

Engineered in the U.S
and Guaranteed for Life.



Photo by Uros Podlogar

PERFORMANCE PELI FLASHLIGHTS

+ STANDARDS AND RATINGS (Applicable to torches only)




LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

+ GLOSSARY OF TERMS

CANDELA A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

RECHARGEABLE Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



SAFETY

IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exacting requirements of ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE II 1G EX IA OP IS IIC T4 GA

ATEX code corresponding to the 1975Z0 torch

Need more information about ATEX?
Please visit www.peli.com/atex



+ COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS

Download our poster on ATEX Directive 2014/34/EU.




HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gases, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	<ul style="list-style-type: none"> – Oil Refinery – – Paint Warehouse – – Offshore Oil Rig – – Spray Booth – 	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	<ul style="list-style-type: none"> – Coal Mine – – Grain Silo – – Munitions Factory – – Hay Storage Facility – 	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	<ul style="list-style-type: none"> – Paper Mill – – Woodworking Facility – – Textile Mill – – Cotton Gin – 	Division 1 (Hazard Likely)	N/A	↓
			Division 2 (Hazard Not Likely)	N/A	
					LEAST

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
Division 1: Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2: Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0: Flammable material present for long periods (more than 1.000 hours* a year).	Category 3 / Zone 2: Flammable material present for short periods (less than 10 hours* a year).
		Category 2 / Zone 1: Flammable material present in normal operation (10- 1.000 hours* a year).	

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

+ DIAGRAM OF CLASS / DIVISIONS / ZONES

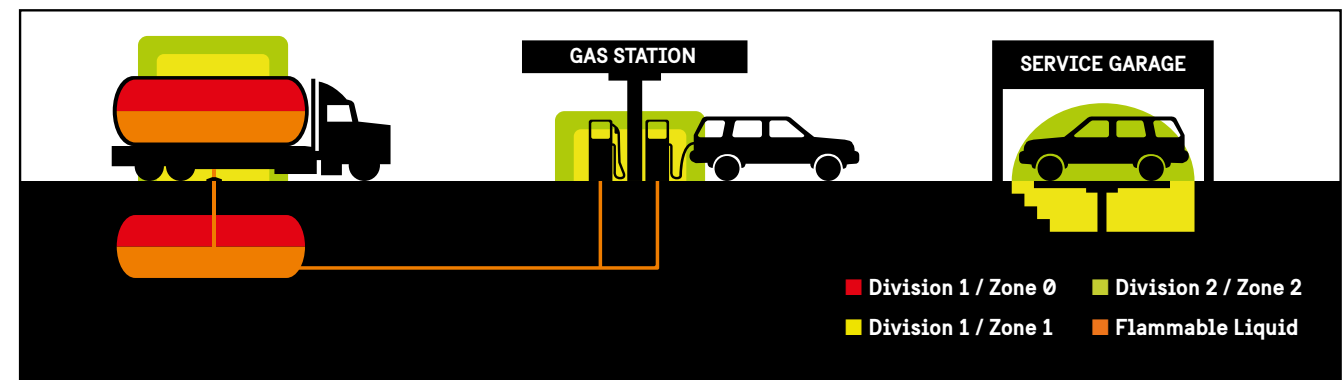

SMALL LIGHTS

When compact is a must or just a convenience, choose from Peli's range of powerful lights. Whether composite or alloy, certified or coloured, you'll find the perfect model for your next job.



PELI SMALL LIGHTS

1910

LIGHT SOURCE//
LED
BATTERIES//
1 AAA Alkaline (included)
LENGTH//
9.7 cm (3.8")
MODES//
High / Low



LUMENS
106
RUN TIME
4h
UP TO



MEDIUM TORCHES

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.



PELI MEDIUM TORCHES

2010 SABRELITE™

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS
161
RUN TIME
22h
UP TO



1920

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.0 cm (5.5")
MODES//
High / Low



LUMENS
224
RUN TIME
8h 45m
UP TO

1930 L1™

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
6.7 cm (2.64")
CERTIFICATIONS//
CI, D1/CII, D2 IECEx ia



LUMENS
12
RUN TIME
4h 15m
UP TO



2410 STEALTHLITE™ LED

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS
126
RUN TIME
7h 30m
UP TO

2460 STEALTHLITE™

LIGHT SOURCE//
LED
BATTERIES//
4 NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II, D2



LUMENS
183
RUN TIME
5h
UP TO



LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.

3310PL PHOTOLUMINESCENT

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
15.6 cm (6.14")
MODES//
High / Low / Flashing
(torch body glows in the dark)



3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
15.6 cm (6.14")
INCLUDES//
3310PL and Wall Mountable Case
(torch body glows in the dark)



5000

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline
LENGTH//
14.2 cm (5.59")
MODES//
High / Low / Flashing




5010

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline
LENGTH//
15.9 cm (6.26")
MODES//
High / Low / Flashing




5020

LIGHT SOURCE//
LED
BATTERIES//
4 AAA Alkaline
LENGTH//
14.9 cm (5.87")
MODES//
High / Medium / Low / Flashing



5050R

LIGHT SOURCE//
LED
BATTERIES//
1 18650 Lithium
LENGTH//
15.6 cm (6.16")
MODES//
Boost / High / Low / Flashing




5-SERIES TORCHES. IPX8 RATED.

Peli 5 Series lights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.



9410L LED LANTERN

LIGHT SOURCE//
LED
BATTERIES//
6 Lithium-ion 18650 (included)
LENGTH//
22.2 cm (8.75")
MODES//
High / Low / Flashing
Full Time Battery Indicator



ATEX TORCHES



Zone 0 & 1 (Cat. 1 & 2)

Peli's extensive range of Zone 0 and Zone 1 torches complies with the highest standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements.

Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

Download our poster on ATEX Directive 2014/34/EU.



1930Z0 L1™

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
6.7 cm (2.64")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga



1975Z0 MITYLITE™

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.6 cm (5.75")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga




1975Z1 MITYLITE™

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.6 cm (5.75")
CERTIFICATIONS//
II 2 G Ex ib op is IIB T4 Gb



2010Z0 SABRELITE™

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
II 1G Ex ia op is IIC T4/T3 Ga



Photoluminescent 2013PL Shroud

2410Z0 STEALTHLITE™

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



2220Z1 VB3™

LIGHT SOURCE//
LED
BATTERIES//
2 CR2032 Lithium (included)
LENGTH//
8.9 cm (3.50")
CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb



2460Z1 STEALTHLITE™

LIGHT SOURCE//
LED
BATTERIES//
4 AA NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
II 2 G Ex ib IIC T3 Gb



2610Z0 HEADSUP LITE™

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
3.8 cm (1.49")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



2690Z0 HEADSUP LITE™

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
7.1 cm (2.81")
CERTIFICATIONS//
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da



* For more information on ATEX, see page 4-5

* For more information on ATEX, see page 4-5



2745Z0 HEADSUP LITE™

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Low / Flashing



2755Z0 HEADSUP LITE™

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Low / Flashing



2765Z0 HEADSUP LITE™

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Low / Downcast / Flashing



3315RZ0

LIGHT SOURCE//
LED
BATTERIES//
1 Lithium Iron Phosphate (included)
LENGTH//
15.5 cm (6.11")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Low / Flashing / Full Time Battery Level Indication



Life expectancy
+2,000 cycles!



Right Angle version available
(3315RZ0-RA**).

3315Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
15.6 cm (6.14")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



3315RZ1

LIGHT SOURCE//
LED
BATTERIES//
1 Lithium-Ion (included)
LENGTH//
15.5 cm (6.11")
CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb
MODES//
High / Low / Flashing / Full Time Battery Level Indication



Right Angle version available
(3315RZ1-RA**).

3345Z0

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline
LENGTH//
18.4 cm (7.25")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Full Time Battery Level Indication



3610Z0 LITTLE ED™

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
19.1 cm (7.51")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



3765Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA NiMH (included)
LENGTH//
13.6 cm (5.36")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga
MODES//
High / Low / Flashing



3415MZ0

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline
LENGTH//
18.9 cm (7.44")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga
MODES//
High / Flashing



Includes
magnetic clip



3715Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline
LENGTH//
13.6 cm (5.36")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da
MODES//
High / Low / Downcast / Flashing



PhotoLuminescent
3713PL Shroud

9415Z0 LED LANTERN

LIGHT SOURCE//
LED
BATTERIES//
4 C NiMH (included)
LENGTH//
22.2 cm (8.75")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga
MODES//
High / Low / Flashing



THE PELI 3715Z0 IS AN ABSOLUTE FAVOURITE

SURVIVAL + STORIES

Compact and it really packs a lot of light. The three types of light are really convenient for different purposes. For instance, the large light to explore incidents and the three small LED lights to read maps or walk in dark areas. I also use this light to train in our hazmat suits. The thick rubber gloves are not an issue when working with the light. The button on top is really good to operate and the grip on the side helped me during the training. This light is really impressive. Compared to our current lights, it really stands out!

Dutch firefighter - Fire Dpt. Brabant-Noord, Boxmeer


Guido Siebers

* For more information on ATEX, see page 4-5. ** Only available upon min. order quantity

* For more information on ATEX, see page 4-5

TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

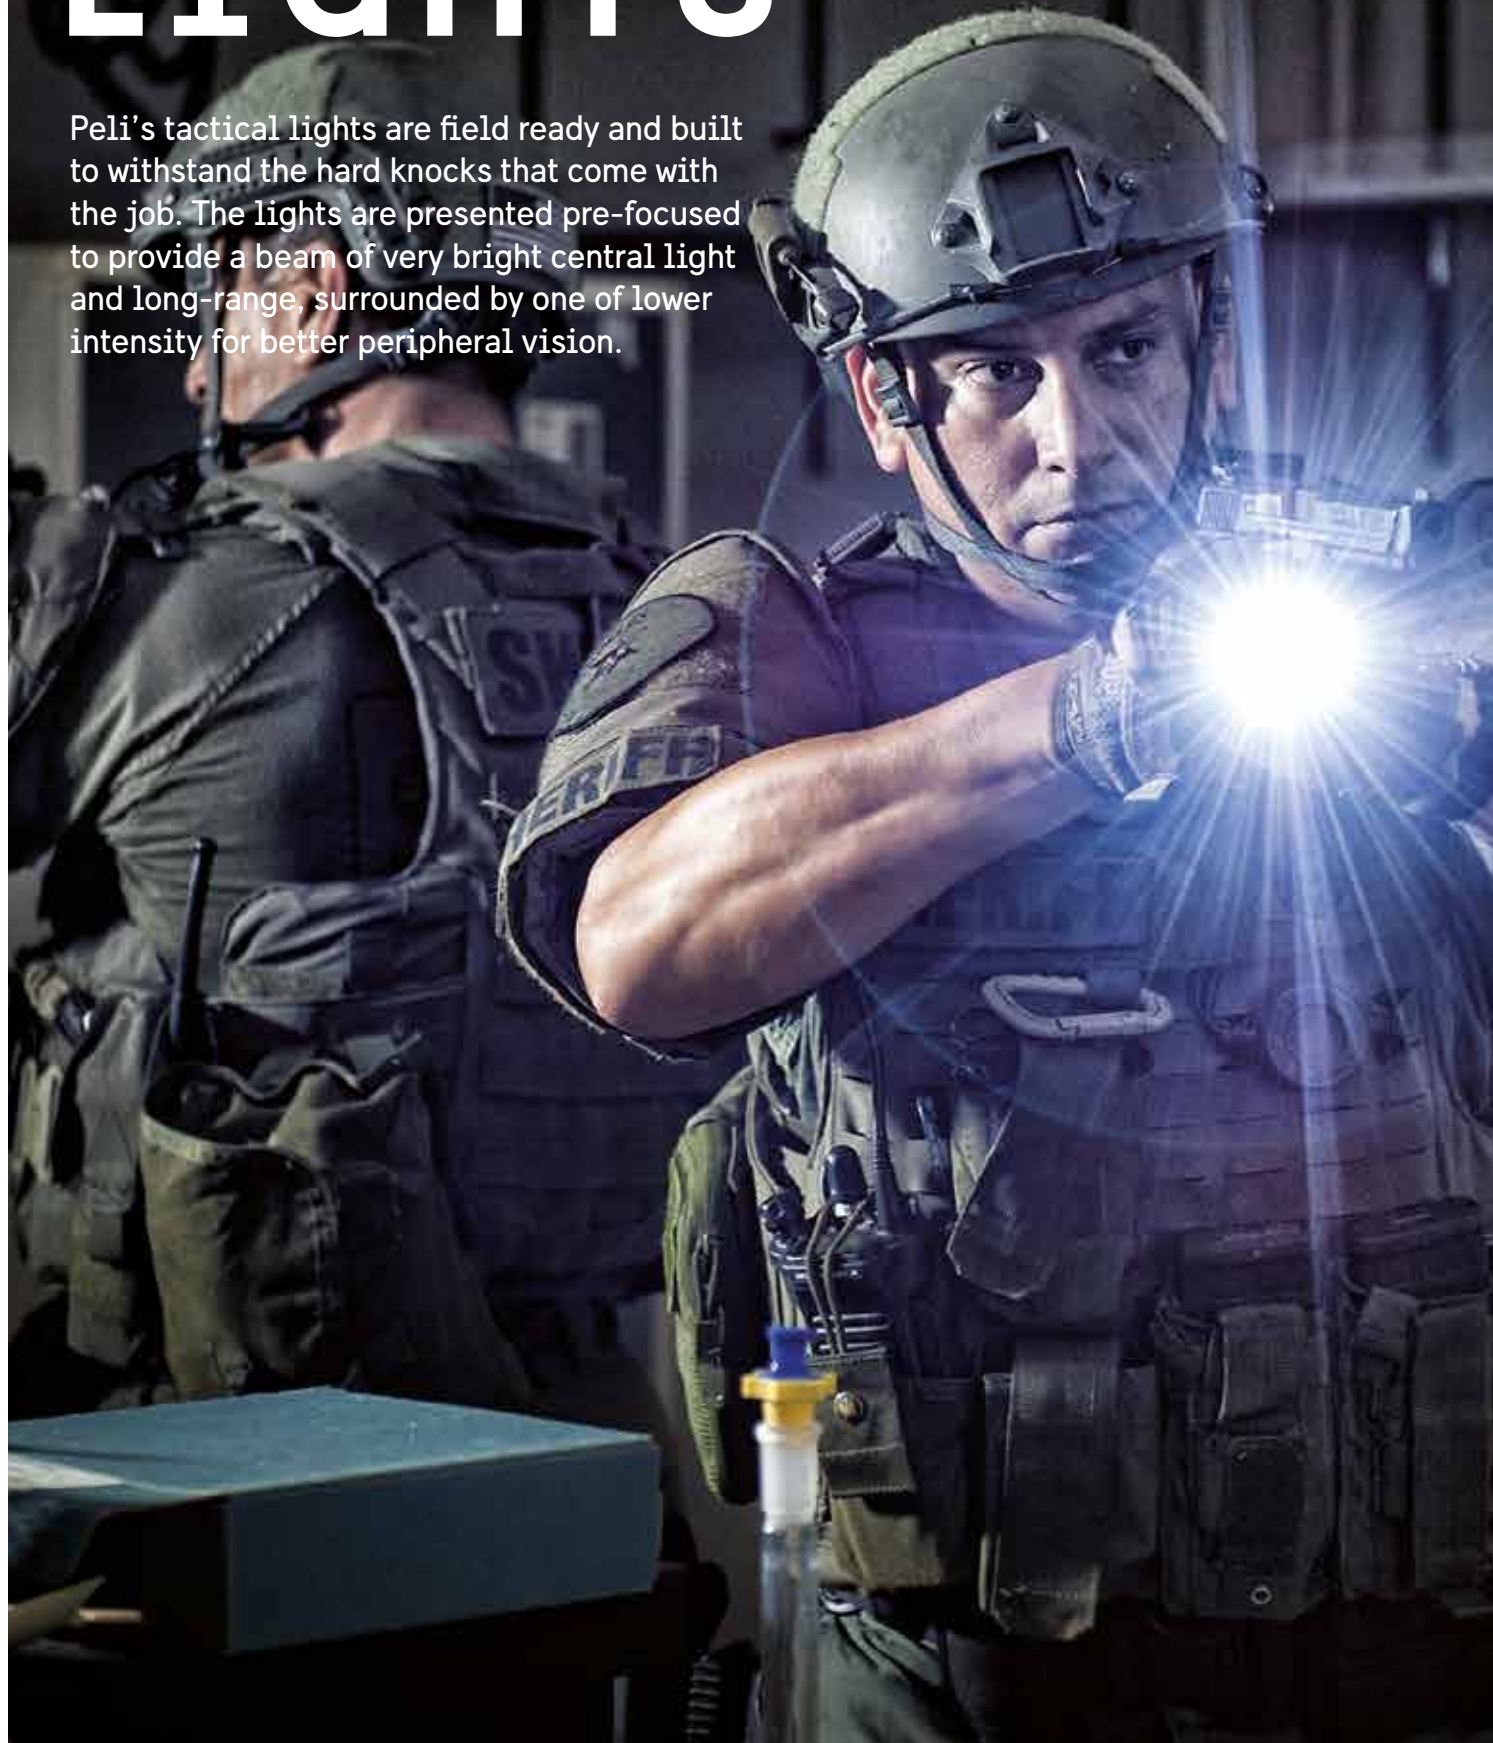

PELI TACTICAL LIGHTS

PELI TACTICAL LIGHTS

7000

LIGHT SOURCE// LED
 BATTERIES// 2 CR123 Lithium-Ion (Included)
 LENGTH// 13.5 cm (5.31")
 MODES// High / Medium / Low / Strobe



LUMENS
774
 RUN TIME
13h

7060

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion 18650 (included)
 LENGTH// 22 cm (8.65")
 MODES// High / Strobe / Medium / Low / Self Programmable



LUMENS
402
 RUN TIME
57h

7070R

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion 18650 (included)*
 LENGTH// 17.5 cm (6.88")
 MODES// High / Medium / Low / Full Time Battery Level Indication / Dual Switches



LUMENS
1219
 RUN TIME
32h



*Multi-battery. Supports also 2 CR123

7100

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion 14500 (included)*
 LENGTH// 13 cm (5.12")
 MODES// High / Strobe / Medium / Low / Full Time Battery Level Indication



LUMENS
695
 RUN TIME
9h 15m



*Multi-battery. Supports also 1 AA

7600

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion 18650 (included)*
 LENGTH// 15.7 cm (6.19")
 MODES// High / Strobe / Medium / Low/ Full Time Battery Level Indication



LUMENS
944
 RUN TIME
29h



*Multi-battery. Supports also 2 CR123

8060

LIGHT SOURCE// LED
 BATTERIES// 4 NiMH C (included)
 LENGTH// 32.2 cm (12.67")
 MODES// High / Strobe / Medium / Low / Flashing / Self Programmable



LUMENS
1072
 RUN TIME
60h



HEADLAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
6.3 cm (2.48")

MODES//
Variable Light Output /
Dual Red LED Night Vision



LUMENS
200
UP TO

RUN TIME
103h



**GESTURE
ACTIVATION
CONTROL**

2740 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low /
Flashing / Red LED



LUMENS
66
UP TO

RUN TIME
21h

2750 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low / Flashing /
Red LED / Low Battery Warning



LUMENS
259
UP TO

RUN TIME
11h

■ (PhotoLuminescent)

2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Medium / Low / Downcast /
Flashing / Red LED / Full-time Battery
Level Indicator



LUMENS
289
UP TO

RUN TIME
11h

2780R HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)

LENGTH//
7.6 cm (3.00")

MODES//
High / Medium / Low /
Downcast / Spot / Flashing
Full-time Battery Level Indicator



LUMENS
558
UP TO

RUN TIME
7h 30m

■ (PhotoLuminescent)
3 Interchangeable Covers Included



LIGHT MOUNTING SYSTEMS AND HOLSTERS



	CAT. NO. 7070RWH	CAT. NO. 7078 NYLON HOLSTER	CAT. NO. 7116	CAT. NO. 7106	CAT. NO. 7606	CAT. NO. 7607	CAT. NO. 7616 CAT. NO. 7617	CAT. NO. 7627
HOLSTER STYLES								
CAT. NO.								
7060		•						
7070R	•							
7100				•				
7110			•					
7600					•	•		
7610							•	
7620								•

	CAT. NO. 0770C, UNIV.	CAT. NO. 0782 ALL IN	CAT. NO. 0783 DOUBLE DOWN	CAT. NO. 2748Z0
LIGHT AND HEADLAMP HOLDER STYLES				
CAT. NO.				
2390	•			
2410	•			
2460	•			
2745Z0				•
2755Z0				•
2765Z0				•
3310	•	•		
3315	•	•		
All Headlamps			•	

PELI LIGHTING TOOLS: MORE THAN A FLASHLIGHT.

Here are just a few features that make our lighting tools shine:

SELF PROGRAMMABLE
(On selected models only)

GESTURE ACTIVATION
(On selected models only)

USB RECHARGEABLE
(On selected models only)

PHOTOLUMINESCENT DESIGNS
(On selected models only)

PIVOTING 60° HEAD
(On selected models only)

DOWNCAST LIGHTING FEATURES
(On selected models only)

LEGENDARY LIFETIME* GUARANTEE

*Lifetime guarantee not applicable where prohibited by law.

	CAT. NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
SMALL LIGHTS	1910	1 AAA Alkaline ^A	0.043	9.7	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1920	2 AAA Alkaline ^A	0.062	14	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1930	4 LR 44 Alkaline ^A	0.026	6.7	12	4h 15m	17	70	IPX4	CI, D1/CII, D2 IECEx ia	■ ■
MEDIUM TORCHES	2010	3 C Alkaline	0.38	20.6	161	22h	160	6398	IPX7	CI II III, D1 IECEx ia	■
	2410	4 AA Alkaline ^A	0.207	17.8	126	7h 30m	161	6500	IPX7	CI II III, D1 IECEx ia	■
	2460	4 Ni-MH ^A	0.221	17.8	183	5h	179	8050	IPX7	CI II, D2	■
	3310PL	3 AA Alkaline ^A	0.176	15.6	234*, 28***	8h 45m*, 190h***	240*, 81m***	14500*, 1649***	IPX7	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline ^A	0.176	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8 (1m)	N/A	■ (photoluminescent)
	5000	2 AAA Alkaline ^A	0.068	14.2	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8 (1m)	N/A	■
	5010	2 AA Alkaline ^A	0.145	15.9	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8 (1m)	N/A	■
	5020	4 AAA Alkaline	0.207	14.9	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8 (1m)	N/A	■
	5050R	1 18650 Lithium ^A	0.164	15.6	393*, 21***, 883****	2h 30m*, 40h**	134*, 30***, 201****	4488*, 224**, 10093****	IPX8 (1m)	N/A	■
	LARGE LIGHTS	9410L	6 Lithium-ion 18650 ^A	1.267	22.2	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A

*High | **Medium | ***Low | ****Boost | ^A Batteries Included | Additional approvals may apply. For details go to www.peli.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUNTIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS
1930Z0	4 LR 44 Alkaline ^A	0.026	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■
1975Z0	2 AAA Alkaline ^A	0.054	14.6	117	2h 15m	24	141	IP68	II 1 G Ex ia op is IIC T4 Ga	■
1975Z1	2 AAA Alkaline ^A	0.054	14.6	94	8h 15m	22	122	IP68	II 2 G Ex ib op is IIB T4 Gb	■
2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	■
2220Z1	2 CR2032 Lithium ^A	0.028	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■
2410Z0	4 AA Alkaline ^A	0.207	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
2460Z1	4 AA Ni-MH ^A	0.221	17.8	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T3 Gb	■
2610Z0	3 AAA Alkaline ^A	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
2690Z0	3 AAA Alkaline ^A	0.116	7.1	74	11h	92	2124	IPX7	I M1 Ex ia l Ma, II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T65°C Da	■
2745Z0	3 AAA Alkaline ^A	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
2755Z0	3 AAA Alkaline ^A	0.096	5.7	115*, 58***	8h*, 16h***	61*, 43***	925*, 455***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
2765Z0	3 AAA Alkaline ^A	0.096	5.7	141*, 27***	5h30m*, 14h***	78*, 9***	1512*, 22***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
3315Z0	3 AA Alkaline ^A	0.176	15.6	138	19h	146	5350	IP67	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■
3315RZ0	1 Lithium Iron Phosphate ^A	0.13	15.5	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IP67	II 1 G Ex ia op is IIC T4 Ga	■
3315RZ1	1 Lithium-Ion ^A	0.13	15.5	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IP67	II 2 G Ex ib op is IIC T4 Gb	■
3345Z0	3 AA Alkaline	0.213	18.4	267 (Flood/Spot), 115 (Flood), 207 (Spot)	7h (Flood/Spot), 14h (Flood), 12h (Spot)	126 (Flood/Spot), 16 (Flood), 134 (Spot)	4000 (Flood/Spot), 61 (Flood), 4523 (Spot)	IPX7	II 1 G Ex ia op is IIC T4 Ga	■
3415MZ0	3 AA Alkaline	0.272	18.9	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8 (1m)	II 1 G Ex ia op is IIC T4 Ga	■
3610Z0	4 AA Alkaline	0.298	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
3715Z0	4 AA Alkaline	0.408	13.6	189*, 90***, 23***	4h*, 7h***, 31h***	249*, 157***, 24***	15552*, 6150***, 150***	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■
3765Z0	4 AA NiMH ^A	0.414	13.6	194*, 92***, 24***	3h 30m*, 6h 45m***, 20h***	256*, 161***, 24***	16392*, 6454***, 146***	IPX4	II 1 G Ex ia op is IIC T3 Ga	■
9415Z0	4 C NiMH ^A	1.65	22.2	530*, 202***	4h 30m*, 11h 30m***	272*, 166***	18480*, 6914***	IPX4	II 1 G Ex ia IIC T4 Ga	■

*High | **Medium | ***Low | ****Downcast | ^ Batteries Included | Additional approvals may apply. For details go to www.peli.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
7000	2 CR123 Lithium ^A	0.159	13.5	774*, 457***, 99***	1h 15m*, 1h 45m***, 13h***	246*, 176***, 83***	14768*, 7712***, 1738***	IPX7	N/A	■
7060	1 Lithium-Ion ^A	0.295	22	402*, 162***, 18***	3h 30m*, 12h***, 57h***	210m*, 131m***, 45m***	11078*, 4312***, 500***	IPX4	N/A	■
7070R	1 Lithium-Ion 18650 ^A	0.224	17.5	1219*, 626***, 32***	2h 15m*, 4h 15m***, 32h***	235*, 168***, 40***	13872*, 7066***, 400***	IPX8 (1m)	N/A	■
7100	1 Lithium-Ion 14500 ^A	0.125	13	695*, 348***, 33***	1h 15m*, 1h 30m***, 9h 15m***	194*, 130***, 38***	9413*, 4247***, 358***	IPX8 (1m)	N/A	■
7600	1 Lithium-Ion 18650 ^A	0.196	15.7	944*, 479***, 37***	3h 15m*, 4h 30m***, 29h***	225*, 157***, 44***	12693*, 6172***, 480***	IPX8 (1m)	N/A	■
8060	4 C NiMH ^A	0.658	32.2	1072*, 551***, 29***	3h 45m*, 4h 15m***, 60h***	376*, 265***, 60***	5300*, 17520***, 889***	IPX6	N/A	■
2720	3 AAA Alkaline ^A	0.108	6.3	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
2740	3 AAA Alkaline ^A	0.094	5.7	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
2750	3 AAA Alkaline ^A	0.096	5.7	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
2760	3 AAA Alkaline ^A	0.096	5.7	289*, 156***, 97***, 42***	1h 30m*, 3h 15m***, 5h 30m***, 11h***	101*, 66***, 48***, 19***	2540*, 1097***, 567***, 88***	IPX4	N/A	■
2780R	1 Lithium-Ion 18650 ^A	0.207	7.6	558*, 213***, 95***	2h*, 3h***, 7h 30m***	127*, 78***, 53***	4060*, 1540***, 695***	IPX4	N/A	■ □ (photoluminescent)

*High | **Medium | ***Low | ****Downcast | ***** Boost | ^ Batteries Included | ^ These values are based on the use of 1 AA battery | ^ These values are based on the use of 2 AA batteries. Additional approvals may apply. For details go to www.peli.com

SMALL LIGHTS PGS 06

1910



1920



1930


MEDIUM TORCHES PGS 07 - 08

2010



2410



2460



3310PL



3310ELS


MEDIUM TORCHES PGS 07 - 08

5000



5010



5020



5050R


LARGE LIGHTS PGS 09

9410L


ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13

1930Z0



1975Z0



1975Z1



2010Z0


ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13

2220Z1



2410Z0



2460Z1



2610Z0



2690Z0



2745Z0



2755Z0



2765Z0



3315Z0



3315Z0-RA*


ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13

3315RZ1



3315RZ1-RA*



3345Z0



3415MZ0



3610Z0



3715Z0



3765Z0



9415Z0


TACTICAL LIGHTS PGS 14 - 15


7000


TACTICAL LIGHTS PGS 14 - 15

7060



7070R



7100



7600



8060


HEADLAMPS PGS 16 - 17

2720



2740



2750



2760



2780R



*Only available upon minimum order quantities