



Cleanroom Management International

We care for your compliance

DESKTOP USB INTERFACE CRADLE



LogTag
North America Inc.

LTI-HID
Desktop USB Interface Cradle



The LogTag® LTI-HID uses interface drivers that are built into all currently supported Windows OS versions, so there is no longer any need to install proprietary drivers.

The LTI-HID is compatible with all standard LogTag® recording products having 3 silver contact pins in the lower rear case. It uses the proven and reliable spring contact arrangement taken from the LTI/USB.

*TRED30-16R and external probe in the image sold separately

Features



Downloads loggers from -20°C to +60°C.



Two indicators at the top (red & green), identify what actions the interface is currently performing.



No longer any need to install proprietary drivers.




Incorporates a micro USB socket for connection to a computer.

Applications



Industrial

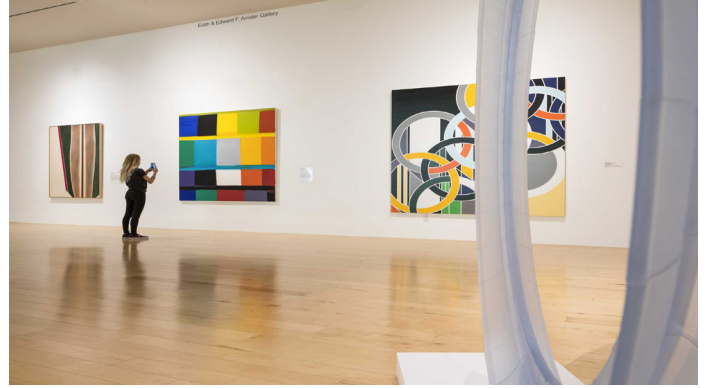

Indoor Spaces



Clinic



Warehouse

Specifications

Product Model	LTI-HID
Operating Temperature Range	-20°C to +60°C
Storage Temperature Range	-40°C to +70°C
USB Standard	2.0
Environmental	IP50 (Rated for indoor use only)
Software Compatibility	LTA 2.9r2, LTA 3.0r8, LTX 1.1r1 LogTag Online
Indicators	Green 'Activity' LED. Red 'Busy/Error' LED
Power Source	Powered from computer
Size	45mm(h) x 85mm(W) x 71mm(D), excluding cable
Weight	74g, excluding cable
Case Material	Polycarbonate, ABS
Connection	USB Micro
Certifications	FCC, CE & RoHS Compliant
Accessories	1.0m USB Cable



CMI BELGIUM

Avenue de Ramelot 3
B - 1480 Saintes (Sint Renelde)
Tel : +32 (0)2 531 11 21
info@cmitest.com

CMI THE NETHERLANDS

Luchthavenweg 81
NL – 5657 EA Eindhoven
Tel : +31 (0)402 88 87 57
infoln@cmitest.com

CMI FRANCE

Ecoparc d'Affaires
F- 41210 Neung-sur-Beuvron
Tel : +33 (0)2 54 95 70 95
infofr@cmitest.com

Agence Rhône Alpes :
F- 26160 La Bégude-de-Mazenc
Tel : +33 (0)4 75 54 57 26



www.cmitest.com