



Cleanroom Management International

We care for your compliance

MEASUREMENT SOLUTIONS

**EX-PROTECTED HUMIDITY  
AND TEMPERATURE TRANSMITTER**



**RELIABLE MEASUREMENTS  
UNDER EXTREME CONDITIONS.**

- Measurement of relative humidity and temperature, optional output of dew point and other calculated parameters
- Safe operation in areas with explosion risk
- Intrinsically safe probes
- Interchangeable stainless steel probes
- Robust aluminium housing



**rotronic**  
MEASUREMENT SOLUTIONS

## TAKE A CLOSE LOOK: THE MAIN ADVANTAGES AT A GLANCE.

The new HygroFlex5-EX series is the latest development in two-channel transmitters for the exact measurement of humidity and temperature in explosive atmospheres. This device conforms to the latest international standards.

The HF5-EX series consists of a robust aluminium transmitter with or without display. The attached probes are cast into a stainless steel tube, and are certified for operation in Zone 0/20. The transmitter itself is certified for Zone 1/21.

### Functional display

- Measurement values with trend indicators
- Configuration via keypad possible

### Proven housing

- Robust, reliable aluminium housing
- Protection class IP66
- Wall or duct mount possible

### Power supply

- 10...28 VDC

### Outputs



- The two analogue outputs can be freely selected and scaled
- 2-wire (2 x 4...20 mA)

### Interchangeable probes

- Different probes can be connected to suit the application
- Easy calibration of the probes outside the explosive zone



### Explosion protection classes (gas and dust)

#### • Transmitter:

-  Ex II 2(1) G Ex eb mb [ia Ga] IIC T5 Gb
-  Ex II 2(1) D Ex tb [ia Da] IIIC T80 °C Db

#### • Probes:

HC2-SM-EX

-  Ex II 1/2 G Ex ia IIC T5 Ga/Gb
-  Ex II 1/2 D Ex ia IIIC T80 °C Da/Db

HC2-IM-EX / HC2-IE-EX

-  Ex II 1/2 G Ex ia IIC T5-T4 Ga/Gb
-  Ex II 1/2 D Ex ia IIIC T80 °C...110 °C Da/Db




### Easy configuration


- The configuration can be specified directly when ordering
- Configuration on site is also possible, using the HW4 software

# INTERCHANGEABLE STAINLESS STEEL PROBES.


Wall mounting

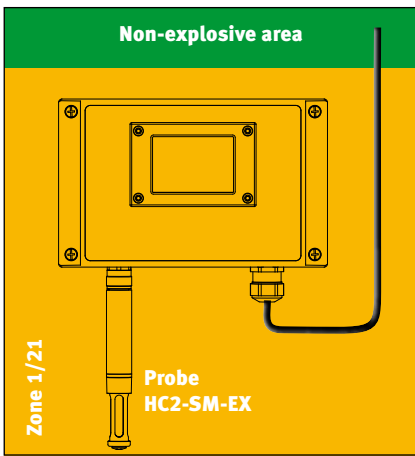


Duct mounting

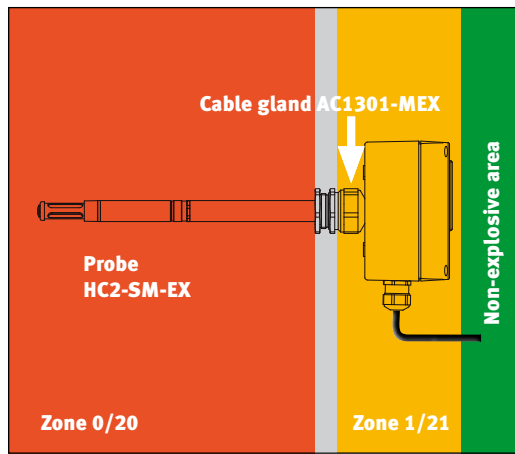

Cable probe for flexible installation

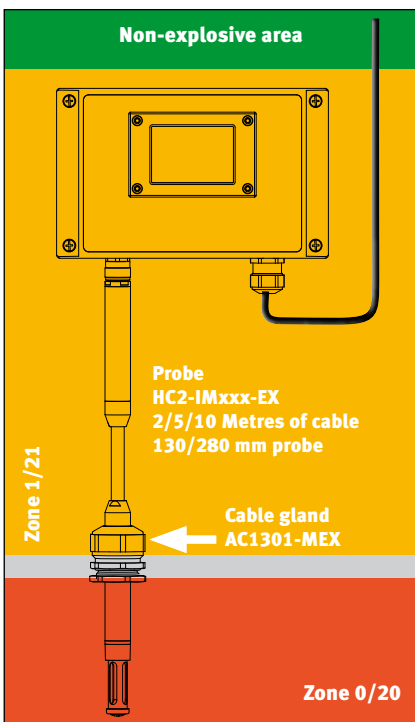


Screw-in cable probe for pressure pipe or low dew point

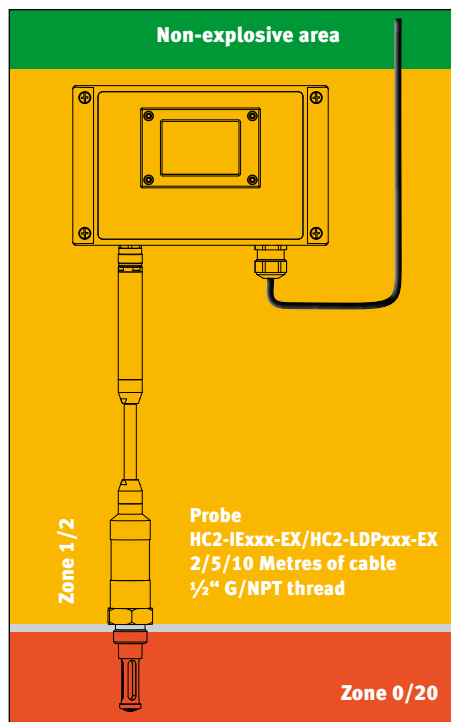

# TECHNICAL INFORMATION.


## HF520-EX-W

Wall mounted version (W)

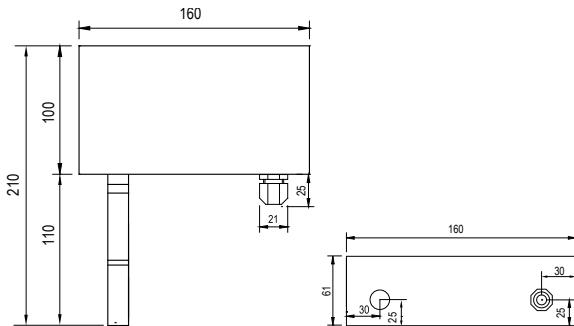


## HF520-EX-D


Duct mounted version (D)

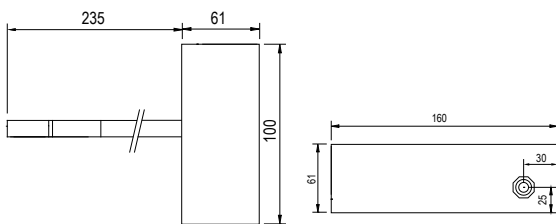


## HC2-SM-EX



## HC2-IMxxx-EX



## HC2-IExxx-EX / HC2-LDPxxx-EX

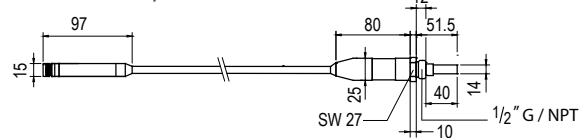

## HF520-EX

General	
Parameters	Humidity and temperature
Calculated parameters	All psychrometric parameters available
Housing material / Protection	Aluminium (DIN EN 1706 EN AC-AISI 12 (Fe)) / IP66
Weight	Wall mounted version: 1030 g Duct mounted version: 1140 g
Start-up time	Standard cold <60 s / warm <30 s
Measurement interval	20...240 s
Display	Optional, LCD without backlight
Electrical connections	Connections: Ex-e terminals (0.2...2.5 mm <sup>2</sup> ) Cable gland: 16 x 1.5 (Ø cable 4.5...7 mm)
Power supply	10...28 VDC
Current Consumption	2x24 mA start up / 2x20 mA operation
Application temperature	-40...60 °C without display
Housing / electronics	-10...60 °C with display
Service interface	UART internal service interface (only to be used outside the explosive zone)
CE / EMC compatibility	EMC Directive 2014/30/EU
ATEX directives	2014/34/EU (ATEX) CSA22.2, UL 508
Identification EX	⊕ II 2(1) G Ex eb mb [ia Ga] IIC T5 Gb ⊕ II 2(1) D Ex tb [ia Da] IIIC T80 °C Db
Analogue output	
Number	2
Current	4...20 mA, two-wire
Galvanic isolation	Yes
Maximum load	500 Ohms
Accuracy at 23 °C	<20 uA

## HC2-SM-EX / HC2-IM-EX / HC2-IE-EX / HC2-LDP-EX

General	
Parameters	Humidity and temperature
Housing material / Protection	Stainless steel / IP66
Cable lengths	2/5/10 metres
Identification EX	⊕ II 1/2 G Ex ia IIC T5...T4 Ga/Gb ⊕ II 1/2 D Ex ia IIIC T80 °C ...T110 °C Da/Db
Humidity measurement	
Sensor	HC2-SM/IM/IE-EX: ROTRONIC HYGROMER® IN-1 HC2-LDP-EX: ROTRONIC HYGROMER® LDP-1
Adjustment	Not via device menu (only outside the explosive zone with HW4 + AC3001)
Measurement range	0...100 %RH
Accuracy at 23 °C	0.8 %RH
Temperature measurement	
Sensor	HC2-SM/IM/IE-EX: Pt100 Class A HC2-LDP-EX: Pt1000 1/3 Class B
Measurement range	-40...60 °C or -40...85 °C
Accuracy at 23 °C	0.1 K

## Accessories

Filters	Steel sinter filter, SP-FN15
Cable gland	AC1301-MEX for duct mounting and cable probes (IM)

Identification EX North America
Class I, Div 1/2, Groups ABCD T5...T4,
Class II, Div 1/2, Groups EFG T80 °C...T110 °C
Ex e mb [ia Ga] IIC T5...T4 Ga/Gb
Ex tb [ia Da] IIIC T80 °C...T110 °C Da/Db
Class I, Zone 0/1, AEx e mb [ia Ga] IIC T5...T4 Ga/Gb
Class II, Zone 20/21, AEx tb [ia Da] IIIC T80 °C...T110 °C Da/Db

### CMi BELGIUM

Avenue de Ramelot 3  
B - 1480 Saintes (Sint Renelde)  
Tel : +32 (0)2 531 11 21  
info@cmitest.com

### CMi FRANCE

Ecoparc d'Affaires  
F- 41210 Neung-sur-Beuvron  
Tel : +33 (0)2 54 95 70 95  
infofr@cmitest.com

Agence Rhône Alpes :  
F- 26160 La Bégude-de-Mazenc  
Tel : +33 (0)4 75 54 57 26



www.cmitest.com