



Crēdo™

XTREME



PALLET BULK SHIPPER

INTRODUCING OUR HIGH PERFORMANCE, EXTREMELY DURABLE PASSIVE TEMPERATURE-CONTROLLED FULL AND HALF PALLET SHIPPING CONTAINER.

This high performance, extremely durable and reusable passive temperature-controlled pallet shipper is offered in two sizes and is ideal for consolidating large domestic and international cargo shipments. Peli BioThermal's Crēdo™ patented technology provides a revolutionary cost effective temperature-controlled pallet shipper that ensures secure transport of high value pharmaceutical and biotech products – qualified to maintain the required temperature range for 96 - 144 hours. Easy removal and installation of the TIC™ (PCM) system for conditioning provides a significant return on investment with less labor costs, greater volumetric payload size, and reduced risk of product compromise.

Product Design Features

- Crēdo™ modular design, full stack pallet system easily converts to half pallet for maximum flexibility of payload volume and shipping cost efficiency
- Convenience of four-way forklift accessibility provides convenience and ease of loading in warehouse storage logistics. Attached tie-down strap system for quick loading and unloading
- Extended passive thermal shipping duration capabilities without messy, bulky gel/ice packs or dry ice
- No electricity or expensive refrigerated cargo shipping required, allowing for more transportation choices and an alleviated payload excursion risk due to power failure
- Multiple temperature ranges (frozen, refrigerated, and controlled room temp) with our patented interchangeable, easy packout TIC™ system with PCM (phase change material)



DURATION

Full / Half Pallet:
96 - 144 Hours
(ISTA7D)



TEMPERATURE

SERIES 4

(2°C to 8°C)

SERIES 22

(15°C to 25°C)

SERIES 20M

(-25°C to -15°C)



PAYLOAD VOLUME


Full Pallet: 807 Litres
Half Pallet: 371 Litres



CRÉDO™ XTREME SELL PRODUCT SPECIFICATION

| | Payload Size | Exterior Dimensions WxDxH | | Interior Dimensions WxDxH | | Tare Weight | |
|-----------|-----------------|---------------------------|--------------|---------------------------|--------------|-------------|-----|
| | | mm | inches | mm | inches | kg | lbs |
| Series 4 | Full Pallet 4C | 1226 x 1022 x 1340 | 48 x 40 x 53 | 1027 x 825 x 953 | 40 x 32 x 38 | 254 | 560 |
| | Half Pallet 4C | 1226 x 1022 x 787 | 48 x 40 x 31 | 1027 x 825 x 438 | 40 x 32 x 17 | 171 | 377 |
| Series 22 | Full Pallet 22C | 1226 x 1022 x 1340 | 48 x 40 x 53 | 1027 x 825 x 953 | 40 x 32 x 38 | 254 | 560 |
| | Half Pallet 22C | 1226 x 1022 x 787 | 48 x 40 x 31 | 1027 x 825 x 438 | 40 x 32 x 17 | 171 | 377 |
| Series 20 | Full Pallet 20M | 1226 x 1022 x 1340 | 48 x 40 x 53 | 1027 x 825 x 953 | 40 x 32 x 38 | 279 | 615 |
| | Half Pallet 20M | 1226 x 1022 x 787 | 48 x 40 x 31 | 1027 x 825 x 438 | 40 x 32 x 17 | 186.9 | 412 |

ADDITIONAL DATA

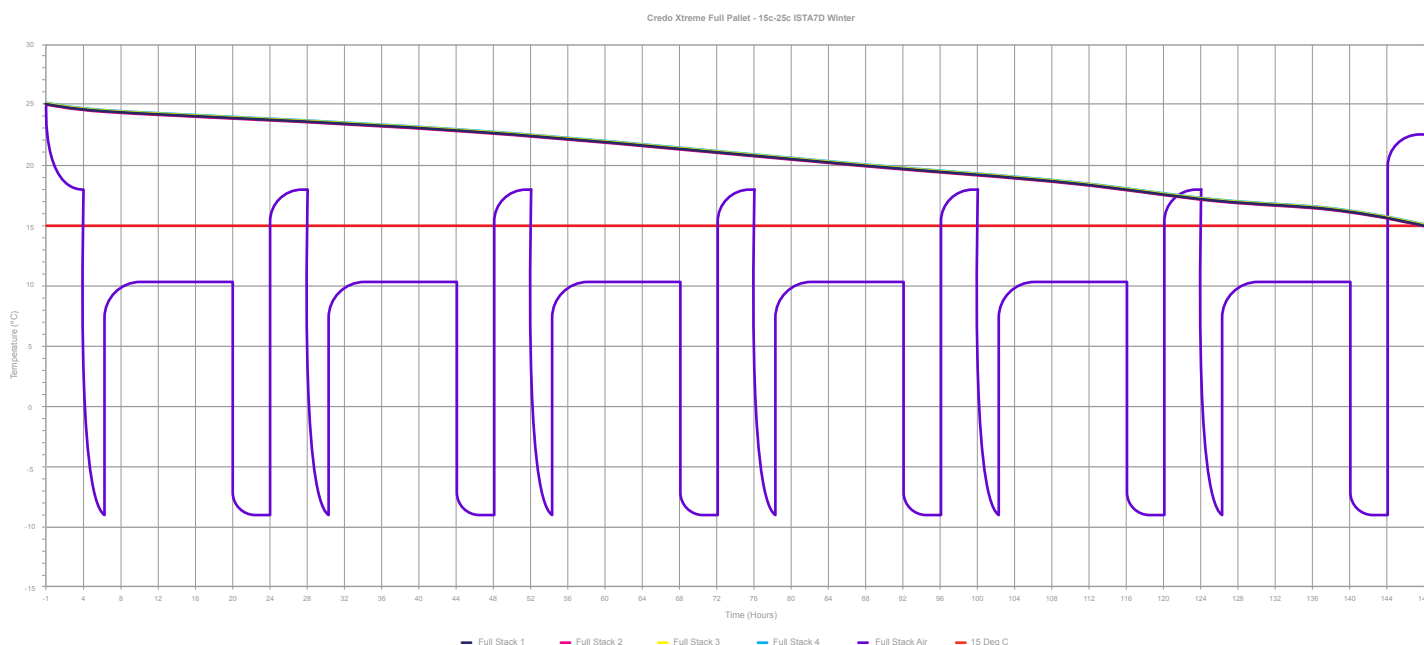

CMI FRANCE

Ecoparc d'Affaires
F- 41210 Neung-sur-Beuvron
Tel : +33 (0)2 54 95 70 95

Agence Rhône Alpes :
F- 26160 La Bégude de Mazenc
Tel: +33 (0)4 75 54 57 26

infofr@cmitest.com
www.cमितest.com



ISO17025, ISO9001-2008 Accredited



PELI
BIO THERMAL™

Golden Hour™, TIC™, Crêdo™, Crêdo Cube™, Crêdo ProEnvision™, Crêdo Xtreme™, Crêdo Duracube™, Crêdo ProMed™, Sherpa Systems™, CoolGuard™ and CoolPall™ are registered trademarks of Pelican Products Inc., its subsidiaries and / or affiliates

©2022 Peli BioThermal Ltd all rights reserved