




Cleanroom Management International
Groupe Trescal

SINGLE-USE PDF LOGGER AT A GLANCE

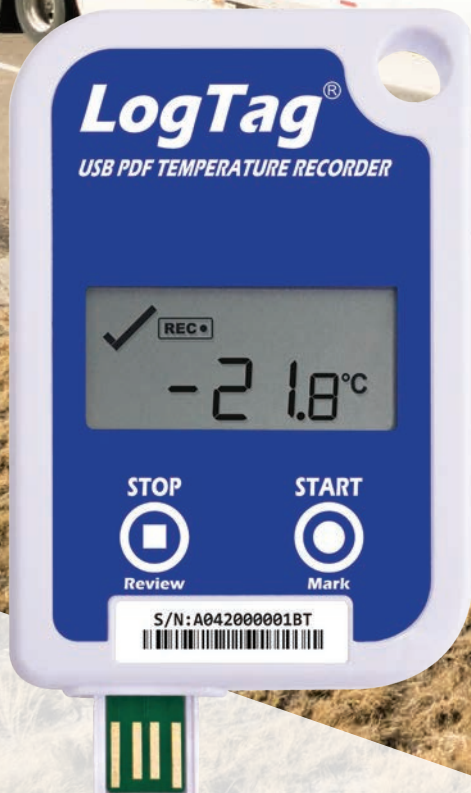

LogTag®


USRID-16
Single-Use Display USB PDF
Temperature Recorder




The LogTag® USRID-16 measures and stores real time temperature readings over a measurement range of -30°C to +60°C (-22°F to +140°F). The LogTag® USRID-16 combines all the features of an advanced temperature recorder with a 16,000 log memory.

The display is designed to show 'at a glance' if there has been a temperature excursion. The USRID-16 plugs directly into the computer USB for an easy configuration by the user for a wide range of recording and alert conditions for upper and lower alarm.

Accessories

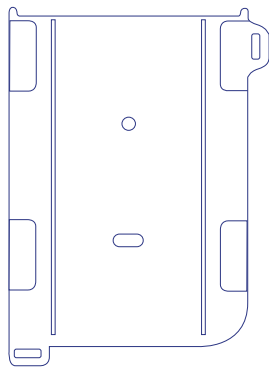

Wall Mount
Not Included

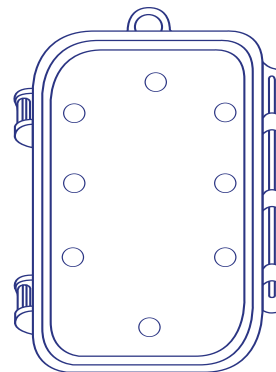

Protective Enclosure
Not Included

Features



Records temperature from -30°C to $+60^{\circ}\text{C}$



Comprehensive customization options including alarm settings, sample interval and trip duration.



Up to 16,000 recordings - enough for the longest trip.



Automatic generation of a PDF, CSV, LTD report without special software.



In-transit inspections can be recorded at the push of a button.



Integral USB connector - no separate Interface Cradle required.



Fixed battery provides 2 years storage, followed by 6 months normal use.

Applications



Pharmaceutical Transport



Vaccines Transport



Produce Transport



Perishables Transport

Specifications

Product Model	USRID-16 (Fixed battery).
Sensor Measurement Range	-30°C to +60°C (-22°F to +140°F).
Operating Temperature Range	-30°C to +60°C (-22°F to +140°F).
Storage Temperature Range	0°C to +40°C (32°F to +104°F). (This is the optimal recommended storage temperature range).
Rated Temperature Reading Accuracy	Better than $\pm 0.5^{\circ}\text{C}$ ($\pm 0.9^{\circ}\text{F}$) for -5°C to $+30^{\circ}\text{C}$ (23°F to $+86^{\circ}\text{F}$). $\pm 0.8^{\circ}\text{C}$ ($\pm 1.5^{\circ}\text{F}$) or better for measurements in other areas of rated range. <i>Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration.</i>
Rated Temperature Reading Resolution	Better than 0.1°C or $^{\circ}\text{F}$. <i>LogTag Analyzer[®] currently displays to one decimal place of $^{\circ}\text{C}$ or $^{\circ}\text{F}$. The native resolution is what is stored in the LogTag[®].</i>
Sensor Reaction Time	Typically less than 7 minutes (T90) in moving air (1m/s).
Recording Capacity	16129 temperature readings. 56 days @ 5min logging.
Sampling Interval	Configurable from 30 seconds to 18 hours.
Logging Start Options	Push button start or specific date & time. Optional start delay of 1 minute to 72 hours.
Recording Indication	'REC' symbol on display.
Alarms	1 upper and 1 lower alarm.
Download Time	Typically with full memory (16,129 readings) in less than 20 seconds from time of insertion to availability of PDF report. Typically less than 10 seconds from time of insertion to availability of LTD file in LogTag [®] Analyzer (if configured).
Environmental	IEC 60529: IP64 with USB cap fitted.
Power Source	CR2032 3V LiMnO ₂ Battery (Non-Replaceable).
Battery Life	2 years storage life, followed by 6 months normal use.
Real Time Clock	Built-in real time clock. Rated accuracy $\pm 25\text{ppm}$ @ 25°C (equivalent to 2.5 seconds/day). Rated temperature coefficient is $-0.034 \pm 0.006\text{ppm}/^{\circ}\text{C}$ (i.e typically ± 0.00294 seconds/day/ $^{\circ}\text{C}$).
Connection Interface	USB 2.0, A-type plug.
Software	PDF Reader, LogTag [®] Analyzer 2.5 or higher.
Size	93mm(H) x 54.5mm(W) x 8.6mm(T) including protective USB cap.
Weight	31g.
Case Material	Polycarbonate.



CMI FRANCE

Ecoparc d'Affaires
F- 41210 Neung-sur-Beuvron
Tel : +33 (0)2 54 95 70 95

Agence Rhône Alpes :
F- 26160 La Bégude de Mazenc
Tel: +33 (0)4 75 54 57 26

infofr@cmitest.com
www.cmitest.com

